


2910. TRILLINGSDEMPER TYPE 1

Afwijkende diameter, hoogte, shore hardheid of draad op aanvraag leverbaar.

Standaard ook in RVS (A2 / A4) leverbaar.

Ook leverbaar in diverse andere materialen zie volgende link [materiaalspecificaties](#)

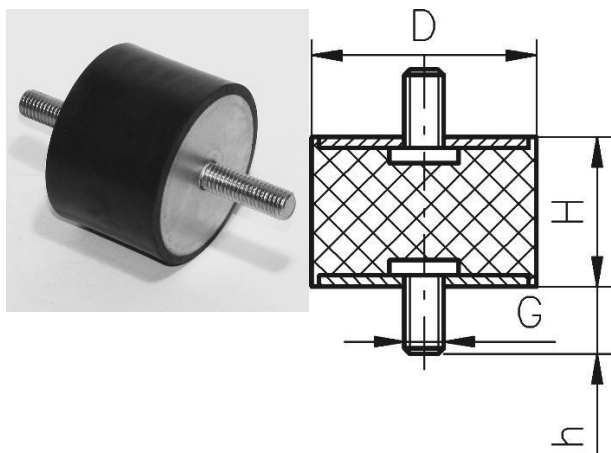

Artikelcode	D	H	G	Draadlengte	G	Lengte	Materiaal
2910.00600700306.000	6	7	M 3	6	M 3	6	NR 55° St. 37
2910.00600800306.000	6	8	M 3	6	M 3	6	NR 55° St. 37
2910.00600900306.000	6	9	M 3	6	M 3	6	NR 55° St. 37
2910.00601000306.000	6	10	M 3	6	M 3	6	NR 55° St. 37
2910.00601300306.000	6	13	M 3	6	M 3	6	NR 55° St. 37
2910.00800500408.000	8	5	M 4	8	M 4	8	NR 55° St. 37
2910.00800600408.000	8	6	M 4	8	M 4	8	NR 55° St. 37
2910.00800800306.000	8	8	M 3	6	M 3	6	NR 55° St. 37
2910.00800800308.000	8	8	M 3	8	M 3	8	NR 55° St. 37
2910.00800800408.000	8	8	M 4	8	M 4	8	NR 55° St. 37
2910.00801000408.000	8	10	M 4	8	M 4	8	NR 55° St. 37
2910.00801300408.000	8	13	M 4	8	M 4	8	NR 55° St. 37
2910.00801500408.000	8	15	M 4	8	M 4	8	NR 55° St. 37
2910.00900700408.000	9	7	M 4	8	M 4	8	NR 55° St. 37
2910.00901200408.000	9	12	M 4	8	M 4	8	NR 55° St. 37
2910.01000504010.000	10	5	M 4	10	M 4	10	NR 55° St. 37
2910.01000505005.000	10	5	M 5	5	M 5	5	NR 55° St. 37
2910.01000604010.000	10	6	M 4	10	M 4	10	NR 55° St. 37
2910.01000804010.000	10	8	M 4	10	M 4	10	NR 55° St. 37
2910.01000904010.000	10	9	M 4	10	M 4	10	NR 55° St. 37
2910.01001003006.000	10	10	M 3	6	M 3	6	NR 55° St. 37
2910.01001004005.100	10	10	M 4	5	M 4	10	NR 55° St. 37

Artikelcode	D	H	G	Draadlengte	G	Lengte	Materiaal	
2910.01001004010.000	10	10	M 4	10	M 4	10	NR 55°	St. 37
2910.01001004010.005	10	10	M 4	10	M 4	10	NR 55°	RVS A2
2910.01001004010.400	10	10	M 4	10	M 4	10	NR 40°	St. 37
2910.01001204010.000	10	12	M 4	10	M 4	10	NR 55°	St. 37
2910.01001504010.000	10	15	M 4	10	M 4	10	NR 55°	St. 37
2910.01001504010.025	10	15	M 4	10	M 4	10	EPDM 55°	St. 37
2910.01001504010.030	10	15	M 4	10	M 4	10	NR 30°	St. 37
2910.01001505008.000	10	15	M 5	8	M 5	8	NR 55°	St. 37
2910.01001704010.000	10	17	M 4	10	M 4	10	NR 55°	St. 37
2910.01001804010.000	10	18	M 4	10	M 4	10	NR 55°	St. 37
2910.01003004010.000	10	30	M 4	10	M 4	10	NR 55°	St. 37
2910.01003004010.320	10	30	M 4	10	M 4	10	EPDM 30°	St. 37
2910.01003004010.420	10	30	M 4	10	M 4	10	EPDM 40°	St. 37
2910.01101104010.000	11	11	M 4	10	M 4	10	NR 55°	St. 37
2910.01200354010.000	12	3,5	M 4	10	M 4	10	NR 55°	St. 37
2910.01200504010.000	12	5	M 4	10	M 4	10	NR 55°	St. 37
2910.01200654010.000	12	6,5	M 4	10	M 4	10	NR 55°	St. 37
2910.01200704010.000	12	7	M 4	10	M 4	10	NR 55°	St. 37
2910.01201004010.000	12	10	M 4	10	M 4	10	NR 55°	St. 37
2910.01201204010.000	12	12	M 4	10	M 4	10	NR 55°	St. 37
2910.01201354010.000	12	13,5	M 4	10	M 4	10	NR 55°	St. 37
2910.01201504010.000	12	15	M 4	10	M 4	10	NR 55°	St. 37
2910.01201504010.025	12	15	M 4	10	M 4	10	EPDM 55°	St. 37
2910.01201504010.030	12	15	M 4	10	M 4	10	NR 30°	St. 37
2910.01201904010.000	12	19	M 4	10	M 4	10	NR 55°	St. 37
2910.01251004010.000	12,5	10	M 4	10	M 4	10	NR 55°	St. 37
2910.01251504010.000	12,5	15	M 4	10	M 4	10	NR 55°	St. 37
2910.01300804010.000	13	8	M 4	10	M 4	10	NR 55°	St. 37
2910.01301004010.000	13	10	M 4	10	M 4	10	NR 55°	St. 37
2910.01301204010.000	13	12	M 4	10	M 4	10	NR 55°	St. 37
2910.01301304010.000	13	13	M 4	10	M 4	10	NR 55°	St. 37
2910.01302004010.000	13	20	M 4	10	M 4	10	NR 55°	St. 37
2910.01500404010.000	15	4	M 4	10	M 4	10	NR 55°	St. 37
2910.01500504010.000	15	5	M 4	10	M 4	10	NR 55°	St. 37
2910.01500604010.000	15	6	M 4	10	M 4	10	NR 55°	St. 37
2910.01500704010.000	15	7	M 4	10	M 4	10	NR 55°	St. 37
2910.01500804010.000	15	8	M 4	10	M 4	10	NR 55°	St. 37
2910.01500805010.000	15	8	M 5	10	M 5	10	NR 55°	St. 37
2910.01500806010.000	15	8	M 6	10	M 6	10	NR 55°	St. 37
2910.01500904010.000	15	9	M 4	10	M 4	10	NR 55°	St. 37
2910.01501004010.000	15	10	M 4	10	M 4	10	NR 55°	St. 37
2910.01501204010.000	15	12	M 4	10	M 4	10	NR 55°	St. 37
2910.01501304010.000	15	13	M 4	10	M 4	10	NR 55°	St. 37

Artikelcode	D	H	G	Draadlengte	G	Lengte	Materiaal	
2910.01501504010.000	15	15	M 4	10	M 4	10	NR 55°	St. 37
2910.01501504013.000	15	15	M 4	13	M 4	13	NR 55°	St. 37
2910.01501505005.000	15	15	M5	5	M5	13	NR 55°	St. 37
2910.01501505012.000	15	15	M5	13	M5	13	NR 55°	St. 37
2910.01501804010.000	15	18	M 4	10	M 4	10	NR 55°	St. 37
2910.01502004010.000	15	20	M 4	10	M 4	10	NR 55°	St. 37
2910.01502005010.000	15	20	M 5	10	M 5	10	NR 55°	St. 37
2910.01502504010.000	15	25	M 4	10	M 4	10	NR 55°	St. 37
2910.01502604010.000	15	26	M 4	10	M 4	10	NR 55°	St. 37
2910.01503004010.000	15	30	M 4	10	M 4	10	NR 55°	St. 37
2910.01503004010.320	15	30	M 4	10	M 4	10	EPDM 30°	St. 37
2910.01503004010.420	15	30	M 4	10	M 4	10	EPDM 40°	St. 37
2910.01601504010.000	16	15	M 4	10	M 4	10	NR 55°	St. 37
2910.01601804010.000	16	18	M 4	10	M 4	10	NR 55°	St. 37
2910.01602004010.000	16	20	M 4	10	M 4	10	NR 55°	St. 37
2910.01700906018.000	17	9	M 4	10	M 4	10	NR 55°	St. 37
2910.01800604010.000	18	6	M 4	10	M 4	10	NR 55°	St. 37
2910.01801004010.000	18	10	M 4	10	M 4	10	NR 55°	St. 37
2910.01801304010.000	18	13	M 4	10	M 4	10	NR 55°	St. 37
2910.01801404010.000	18	14	M 4	10	M 4	10	NR 55°	St. 37
2910.01801504010.000	18	15	M 4	10	M 4	10	NR 55°	St. 37
2910.02000506018.000	20	5	M 6	18	M 6	18	NR 55°	St. 37
2910.02000606018.000	20	6	M 6	18	M 6	18	NR 55°	St. 37
2910.02000706018.000	20	7	M 6	18	M 6	18	NR 55°	St. 37
2910.02000806018.000	20	8	M 6	18	M 6	18	NR 55°	St. 37
2910.02000906018.000	20	9	M 6	18	M 6	18	NR 55°	St. 37
2910.02001005010.000	20	10	M 5	10	M 5	10	NR 55°	St. 37
2910.02001005015.000	20	10	M 5	15	M 5	15	NR 55°	St. 37
2910.02001005018.000	20	10	M 5	18	M 5	18	NR 55°	St. 37
2910.02001006010.000	20	10	M 6	10	M 6	10	NR 55°	St. 37
2910.02001006018.000	20	10	M 6	18	M 6	18	NR 55°	St. 37
2910.02001106018.000	20	11	M 6	18	M 6	18	NR 55°	St. 37
2910.02001206018.000	20	12	M 6	18	M 6	18	NR 55°	St. 37
2910.02001306018.000	20	13	M 6	18	M 6	18	NR 55°	St. 37
2910.02001505013.000	20	15	M 5	13	M 5	13	NR 55°	St. 37
2910.02001506010.000	20	15	M 6	10	M 6	10	NR 55°	St. 37
2910.02001506010.430	20	15	M 6	10	SW 23	10	NR 55°	St. 37
2910.02001506015.000	20	15	M 6	15	M 6	15	NR 55°	St. 37
2910.02001506018.000	20	15	M 6	18	M 6	18	NR 55°	St. 37
2910.02001506018.009	20	15	M 6	18	M 6	18	NR 55°	RVS A2
2910.02001506018.025	20	15	M 6	18	M 6	18	EPDM 50°	RVS A2
2910.02001706018.000	20	17	M 6	18	M 6	18	NR 55°	St. 37
2910.02001806018.000	20	18	M 6	18	M 6	18	NR 55°	St. 37

Artikelcode	D	H	G	Draadlengte	G	Lengte	Materiaal	
2910.02002006010.000	20	20	M 6	10	M 6	10	NR 55°	St. 37
2910.02002006018.000	20	20	M 6	18	M 6	18	NR 55°	St. 37
2910.02002206018.000	20	22	M 6	18	M 6	18	NR 55°	St. 37
2910.02002306018.000	20	23	M 6	18	M 6	18	NR 55°	St. 37
2910.02002506018.000	20	25	M 6	18	M 6	18	NR 55°	St. 37
2910.02002506018.005	20	25	M 6	18	M 6	18	NR 55°	RVS A2
2910.02003006018.000	20	30	M 6	18	M 6	18	NR 55°	St. 37
2910.02004006018.000	20	40	M 6	18	M 6	18	NR 55°	St. 37
2910.02006006018.000	20	60	M 6	18	M 6	18	NR 55°	St. 37
2910.02500806018.000	25	8	M 6	18	M 6	18	NR 55°	St. 37
2910.02501006012.000	25	10	M 6	12	M 6	12	NR 55°	St. 37
2910.02501006018.000	25	10	M 6	18	M 6	18	NR 55°	St. 37
2910.02501006018.005	25	10	M 6	18	M 6	18	NR 55°	RVS A2
2910.02501008020.000	25	10	M 8	20	M 8	20	NR 55°	St. 37
2910.02501206018.000	25	12	M 6	18	M 6	18	NR 55°	St. 37
2910.02501306013.000	25	13	M 6	13	M 6	13	NR 55°	St. 37
2910.02501306018.000	25	13	M 6	18	M 6	18	NR 55°	St. 37
2910.02501406018.000	25	14	M 6	18	M 6	18	NR 55°	St. 37
2910.02501506018.000	25	15	M 6	18	M 6	18	NR 55°	St. 37
2910.02501706018.000	25	17	M 6	18	M 6	18	NR 55°	St. 37
2910.02501806018.000	25	18	M 6	18	M 6	18	NR 55°	St. 37
2910.02501806019.000	25	18	M 6	18	M 6	30	NR 55°	St. 37
2910.02501906018.000	25	19	M 6	18	M 6	18	NR 55°	St. 37
2910.02502006018.000	25	20	M 6	18	M 6	18	NR 55°	St. 37
2910.02502006018.005	25	20	M 6	18	M 6	18	NR 55°	RVS A2
2910.02502008023.000	25	20	M 6	23	M 6	23	NR 55°	St. 37
2910.02502206018.000	25	22	M 6	18	M 6	18	NR 55°	St. 37
2910.02502506006.000	25	25	M 6	6	M 6	6	NR 55°	St. 37
2910.02502506015.005	25	25	M 6	15	M 6	15	NR 55°	RVS A2
2910.02502506018.000	25	25	M 6	18	M 6	18	NR 55°	St. 37
2910.02502506018.025	25	25	M 6	18	M 6	18	EPDM 55°	RVS A2
2910.02502508012.300	25	25	M 8	12	M 8	12	NR 55°	St. 37
2910.02502706018.000	25	27	M 6	18	M 6	18	NR 55°	St. 37
2910.02502806018.000	25	28	M 6	18	M 6	18	NR 55°	St. 37
2910.02503006010.000	25	30	M 6	10	M 6	10	NR 55°	St. 37
2910.02503006018.000	25	30	M 6	18	M 6	18	NR 55°	St. 37
2910.02503008020.000	25	30	M 8	20	M 8	20	NR 55°	St. 37
2910.02504006018.000	25	40	M 6	18	M 6	18	NR 55°	St. 37
2910.03000608020.000	30	6	M 8	20	M 8	20	NR 55°	St. 37
2910.03000708020.000	30	7	M 8	20	M 8	20	NR 55°	St. 37
2910.03000800820.000	30	8	M 8	20	M 8	20	NR 55°	St. 37
2910.03001008020.000	30	10	M 8	20	M 8	20	NR 55°	St. 37
2910.03001208020.000	30	12	M 8	20	M 8	20	NR 55°	St. 37

Artikelcode	D	H	G	Draadlengte	G	Lengte	Materiaal	
2910.03001308020.000	30	13	M 8	20	M 8	20	NR 55°	St. 37
2910.03001508015.000	30	15	M 8	15	M 8	15	NR 55°	St. 37
2910.03001508020.000	30	15	M 8	20	M 8	20	NR 55°	St. 37
2910.03001608020.000	30	16	M 8	20	M 8	20	NR 55°	St. 37
2910.03001708013.000	30	17	M 8	13	M 8	13	NR 55°	St. 37
2910.03001708020.000	30	17	M 8	20	M 8	20	NR 55°	St. 37
2910.03001808020.000	30	18	M 8	20	M 8	20	NR 55°	St. 37
2910.03002006010.000	30	20	M 6	10	M 6	20	NR 55°	St. 37
2910.03002006010.700	30	20	M 6	10	M 6	20	NR 70°	St. 37
2910.03002006010.850	30	20	M 6	10	M 6	20	NR 85°	St. 37
2910.03002008020.000	30	20	M 8	20	M 8	20	NR 55°	St. 37
2910.03002008020.005	30	20	M 8	20	M 8	20	NR 55°	RVS A2
2910.03002008020.006	30	20	M 8	20	M 8	20	NR 55°	RVS A4
2910.03002208020.000	30	22	M 8	20	M 8	20	NR 55°	St. 37
2910.03002508020.000	30	25	M 8	20	M 8	20	NR 55°	St. 37
2910.03002508020.005	30	25	M 8	20	M 8	20	NR 55°	RVS A2
2910.03002508030.000	30	25	M 8	30	M 8	30	NR 55°	St. 37
2910.03002708020.000	30	27	M 8	20	M 8	20	NR 55°	St. 37
2910.03002808020.000	30	28	M 8	20	M 8	20	NR 55°	St. 37
2910.03003006030.000	30	30	M 6	30	M 6	30	NR 55°	St. 37
2910.03003008020.000	30	30	M 8	20	M 8	20	NR 55°	St. 37
2910.03003008020.005	30	30	M 8	20	M 8	20	NR 55°	RVS A2
2910.03003008020.400	30	30	M 8	20	M 8	20	NR 40°	St. 37
2910.03003008020.700	30	30	M 8	20	M 8	20	NR 70°	St. 37
2910.03003010020.000	30	30	M10	20	M10	20	NR 55°	St. 37
2910.03003506020.400	30	35	M 6	20	M 6	20	NR 40°	St. 37
2910.03003508020.000	30	35	M 8	20	M 8	20	NR 55°	St. 37
2910.03003508020.400	30	35	M 8	20	M 8	20	NR 40°	St. 37
2910.03003608020.000	30	36	M 8	20	M 8	20	NR 55°	St. 37
2910.03004008020.000	30	40	M 8	20	M 8	20	NR 55°	St. 37
2910.03004208020.000	30	42	M 8	20	M 8	20	NR 55°	St. 37
2910.03004508020.000	30	45	M 8	20	M 8	20	NR 55°	St. 37
2910.03005008013.000	30	50	M 8	13	M 8	13	NR 70°	St. 37
2910.03005008020.000	30	50	M 8	20	M 8	20	NR 55°	St. 37
2910.03301208020.000	33	12	M 8	20	M 8	20	NR 55°	St. 37
2910.03502006010.700	35	20	M 6	10	M 6	20	NBR 70°	St. 37
2910.03502008020.000	35	20	M 8	20	M 8	20	NR 55°	St. 37
2910.03502508020.000	35	25	M 8	20	M 8	20	NR 55°	St. 37
2910.03503008020.000	35	30	M 8	20	M 8	20	NR 55°	St. 37
2910.03504008020.000	35	40	M 8	20	M 8	20	NR 55°	St. 37
2910.03504508020.000	35	45	M 8	20	M 8	20	NR 55°	St. 37
2910.04001008023.000	40	10	M 8	23	M 8	23	NR 55°	St. 37
2910.04001008040.000	40	10	M 8	23	M 8	23	NR 55°	St. 37

Artikelcode	D	H	G	Draadlengte	G	Lengte	Materiaal	
2910.04001508023.000	40	15	M 8	23	M 8	23	NR 55°	St. 37
2910.04001708023.000	40	17	M 8	23	M 8	23	NR 55°	St. 37
2910.04002006018.006	40	20	M 6	18	M 6	18	NR 55°	RVS A4
2910.04002008015.000	40	20	M 8	15	M 8	30	NR 55°	St. 37
2910.04002008015.026	40	20	M 8	15	M 8	30	EPDM 55°	RVS A4
2910.04002008023.000	40	20	M 8	23	M 8	23	NR 55°	St. 37
2910.04002008033.000	40	20	M 8	33	M 8	33	NR 55°	St. 37
2910.04002010028.400	40	20	M10	28	M10	28	NR 40°	St. 37
2910.04002508023.000	40	25	M 8	23	M 8	23	NR 55°	St. 37
2910.04002708023.000	40	27	M 8	23	M 8	23	NR 55°	St. 37
2910.04002710023.005	40	27	M10	23	M 8	23	NR 55°	RVS A2
2910.04002808023.000	40	28	M 8	23	M 8	23	NR 55°	St. 37
2910.04003008023.000	40	30	M 8	23	M 8	23	NR 55°	St. 37
2910.04003008023.005	40	30	M 8	23	M 8	23	NR 55°	RVS A2
2910.04003008023.006	40	30	M 8	23	M 8	23	NR 55°	RVS A4
2910.04003408023.000	40	34	M 8	23	M 8	23	NR 55°	St. 37
2910.04003508023.000	40	35	M 8	23	M 8	23	NR 55°	St. 37
2910.04003808023.000	40	38	M 8	23	M 8	23	NR 55°	St. 37
2910.04004006020.000	40	40	M 8	23	M 8	23	NR 55°	St. 37
2910.04004008023.000	40	40	M 8	23	M 8	23	NR 55°	St. 37
2910.04004008023.005	40	45	M 8	23	M 8	23	NR 55°	RVS A2
2910.04004008040.000	40	40	M 8	40	M 8	40	NR 55°	St. 37
2910.04004010015.000	40	40	M10	15	M 6	20	NR 55°	St. 37
2910.04004010033.000	40	40	M10	33	M10	33	NR 55°	St. 37
2910.04004508023.000	40	45	M 8	23	M 8	23	NR 55°	St. 37
2910.04005008023.000	40	50	M 8	23	M 8	23	NR 55°	St. 37
2910.04005508023.000	40	55	M 8	23	M 8	23	NR 55°	St. 37
2910.04006008023.000	40	60	M 8	23	M 8	23	NR 55°	St. 37
2910.04304508023.000	43	45	M 8	23	M 8	23	NR 55°	St. 37
2910.04505008023.000	45	50	M 8	23	M 8	23	NR 55°	St. 37
2910.05000710028.000	50	7	M10	28	M10	28	NR 55°	St. 37
2910.05000910008.000	50	9	M10	28	M10	28	NR 55°	St. 37
2910.05001010028.000	50	10	M10	28	M10	28	NR 55°	St. 37
2910.05001210028.000	50	12	M10	28	M10	28	NR 55°	St. 37
2910.05001510028.000	50	15	M10	28	M10	28	NR 55°	St. 37
2910.05001710028.000	50	17	M10	28	M10	28	NR 55°	St. 37
2910.05001810028.000	50	18	M10	28	M10	28	NR 55°	St. 37
2910.05002010013.000	50	20	M10	13	M10	28	NR 55°	St. 37
2910.05002010013.005	50	20	M10	13	M10	13	NR 55°	RVS A2
2910.05002010013.655	50	20	M10	13	M10	13	NR 65°	RVS A2
2910.05002010018.000	50	20	M10	18	M10	18	NR 55°	St. 37
2910.05002010018.700	50	20	M10	18	M10	18	NR 70°	St. 37
2910.05002010028.000	50	20	M10	28	M10	28	NR 55°	St. 37

Artikelcode	D	H	G	Draadlengte	G	Lengte	Materiaal
2910.05002010033.005	50	20	M10	33	M10	33	NR 55° RVS A2
2910.05002010033.655	50	20	M10	33	M10	33	NR 65° RVS A2
2910.05002510028.000	50	25	M10	28	M10	28	NR 55° St. 37
2910.05002512037.000	50	25	M12	37	M12	37	NR 55° St. 37
2910.05003008023.800	50	30	M 8	23	M 8	23	NR 80° St. 37
2910.05003008023.820	50	30	M 8	23	M 8	23	EPDM 80° St. 37
2910.05003010028.000	50	30	M10	28	M10	28	NR 55° St. 37
2910.05004010028.000	50	40	M10	28	M10	28	NR 55° St. 37
2910.05004510028.000	50	45	M10	28	M10	28	NR 55° St. 37
2910.05005010028.000	50	50	M10	28	M10	28	NR 55° St. 37
2910.06002510025.000	60	25	M10	25	M10	25	NR 55° St. 37
2910.06003010028.000	60	30	M10	28	M10	28	NR 55° St. 37
2910.06003510028.000	60	35	M10	28	M10	28	NR 55° St. 37
2910.06004010028.000	60	40	M10	28	M10	28	NR 55° St. 37
2910.06005010028.000	60	50	M10	28	M10	28	NR 55° St. 37
2910.06006010028.000	60	60	M10	28	M10	28	NR 55° St. 37
2910.07004510028.000	70	45	M10	28	M10	28	NR 55° St. 37
2910.07004510028.800	70	45	M10	28	M10	28	NR 80° St. 37
2910.07004512037.000	70	45	M12	37	M12	37	NR 55° St. 37
2910.07005010028.000	70	50	M10	28	M10	28	NR 55° St. 37
2910.07006012037.000	70	60	M12	37	M12	37	NR 55° St. 37
2910.07502512017.005	75	25	M12	17	M12	17	NR 55° RVS A2
2910.07502512017.655	75	25	M12	17	M12	17	NR 65° RVS A2
2910.07502512037.000	75	25	M12	37	M12	37	NR 55° St. 37
2910.07502512037.005	75	25	M12	37	M12	37	NR 55° RVS A2
2910.07502512037.655	75	25	M12	37	M12	37	NR 65° RVS A2
2910.07503012037.000	75	30	M12	37	M12	37	NR 55° St. 37
2910.07504012037.000	75	40	M12	37	M12	37	NR 55° St. 37
2910.07504012037.020	75	40	M12	37	M12	37	EPDM 55° St. 37
2910.07505012037.000	75	50	M12	37	M12	37	NR 55° St. 37
2910.07505012037.005	75	50	M12	37	M12	37	NR 55° RVS A2
2910.07505512037.000	75	55	M12	37	M12	37	NR 55° St. 37
2910.08004014037.000	80	40	M14	37	M14	37	NR 55° St. 37
2910.08008016041.000	80	80	M16	41	M16	41	NR 55° St.37
2910.08008016043.005	80	80	M16	43	M16	43	NR 55° RVS A2
2910.10004016041.000	100	40	M16	41	M16	41	NR 55° St. 37
2910.10004016041.005	100	40	M16	41	M16	41	NR 55° RVS A2
2910.10005016041.000	100	50	M16	41	M16	41	NR 55° St. 37
2910.10005516041.000	100	55	M16	41	M16	41	NR 55° St. 37
2910.10005516041.850	100	55	M16	41	M16	41	NR 85° St. 37
2910.10006016041.000	100	60	M16	41	M16	41	NR 55° St. 37
2910.10007516041.000	100	75	M16	41	M16	41	NR 55° St. 37
2910.10010016041.000	100	100	M16	41	M16	41	NR 55° St. 37

Artikelcode	D	H	G	Draadlengte	G	Lengte	Materiaal	
2910.12510016041.000	150	100	M16	41	M16	41	NR 55°	St. 37
2910.15006016041.000	160	60	M16	41	M16	41	NR 55°	St. 37
2910.15007520045.000	150	75	M20	45	M20	45	NR 55°	St. 37
2910.15010020046.000	150	100	M20	46	M20	46	NR 55°	St. 37